



Industrie Service

ISO 15848-1 QUALIFICATION CERTIFICATE

Certificate No.: 300232

Ref. Test report No.: 300231

We hereby certify that the valve below has passed the fugitive emission test successfully according to Class BH of ISO15848-1:2015+Amd.1:2017 for a total of **2500** cycles.

Name of manufacturer	KUN-LOK Fluid Control Equipment (Jiangsu) Co.,Ltd
Address of manufacturer	20 Xingyu Road, Airport New District, Wenzhou, Zhejiang
Item	DN25-6000PSI Sampling Valve
Valve size	DN25
Pressure rating	6000PSI
Stem size	Φ6mm
Body/bonnet material	ASTM A182 F316
Seal material	PTFE
Valve assembly drawing no.	S6-7N15-FN4FN2

The tested valve covers performance class (para.6.6):

ISO FE BH – CO3 –SSA 0 – t RT – 6000PSI – ISO 15848-1

Extension of qualification (in particular) to untested valves in accordance with paragraph 8 of ISO15848-1.

Other stem sizes qualified: 3mm up to 12mm

Other pressure ranges qualified: 6000PSI and lower

This certificate must be read in conjunction with test report No.: 300231

Shanghai, Dec. 4, 2023
(Place, date)

Xie Zhenrong
TÜV SÜD Certification and Testing (China) Co., Ltd
 No.151, Hengtong Road
 200070 Shanghai P.R. China



TÜV SÜD Certification and Testing (China) Co., Ltd
 Shanghai Office
 Floor 3-13, No.151, Heng Tong Road,
 Shanghai 200070 P. R. China

Tel.: +86 21 6141-0123
 Fax: + 86 21 6140-8600



Test Report

(Valve fugitive emission test according to ISO15848-1: 2015+Amd.1:2017)

Certificate No. : 300232
Test Report No.: 300231

Applicant / Manufacturer: KUN-LOK Fluid Control Equipment (Jiangsu) Co.,Ltd.

Inspection body: TÜV SÜD Certification and Testing (China) Co., Ltd
Floor 3-13, No.151, Heng Tong Road, Shanghai, P. R. China

Lab of test: Wenzhou Haichuan Inspection Co., Ltd.

Test Date: Sep. 26~28, 2023

Description of valves: DN25-6000PSI Sampling Valve

Size: DN25

Pressure Rating: 6000PSI

Drawing No.: S6-7N15-FN4FN2

Test Witnessed By: Wang Zhongxiang / TÜV SÜD Inspector

Inspection and Tests

1. Conformity of Equipment

The test equipment was verified by TÜV SÜD inspector according to requirements of ISO15848-1:2015+Amd.1:2017 and found satisfactory. The detailed arrangement of the fugitive emission test equipment is shown below:

Figure 1 Typical stem seal leakage measurement system with Bagging Method


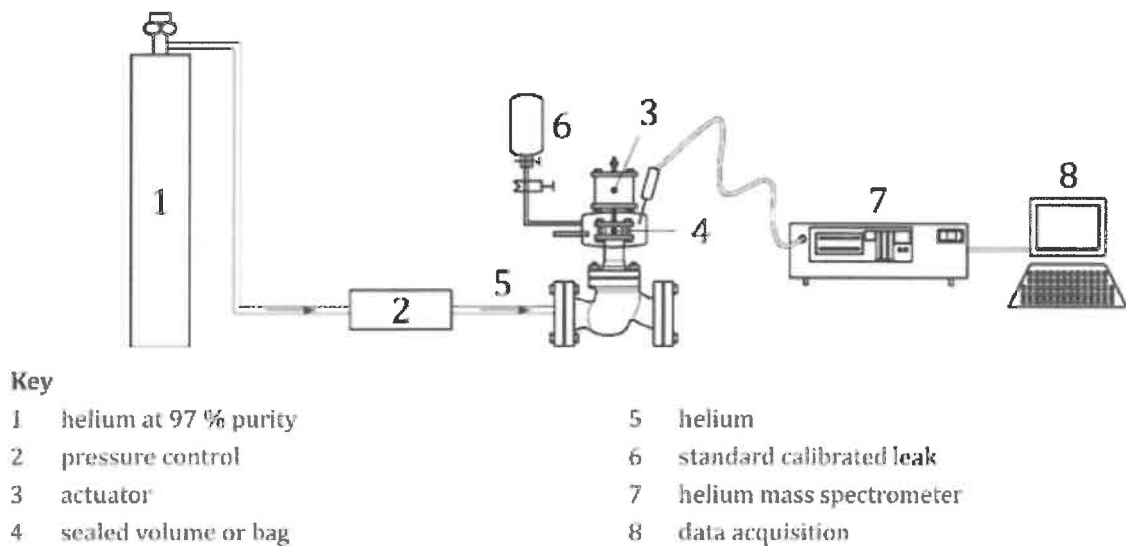


Figure 2 Typical body seal leakage measurement system with Sniffing Method

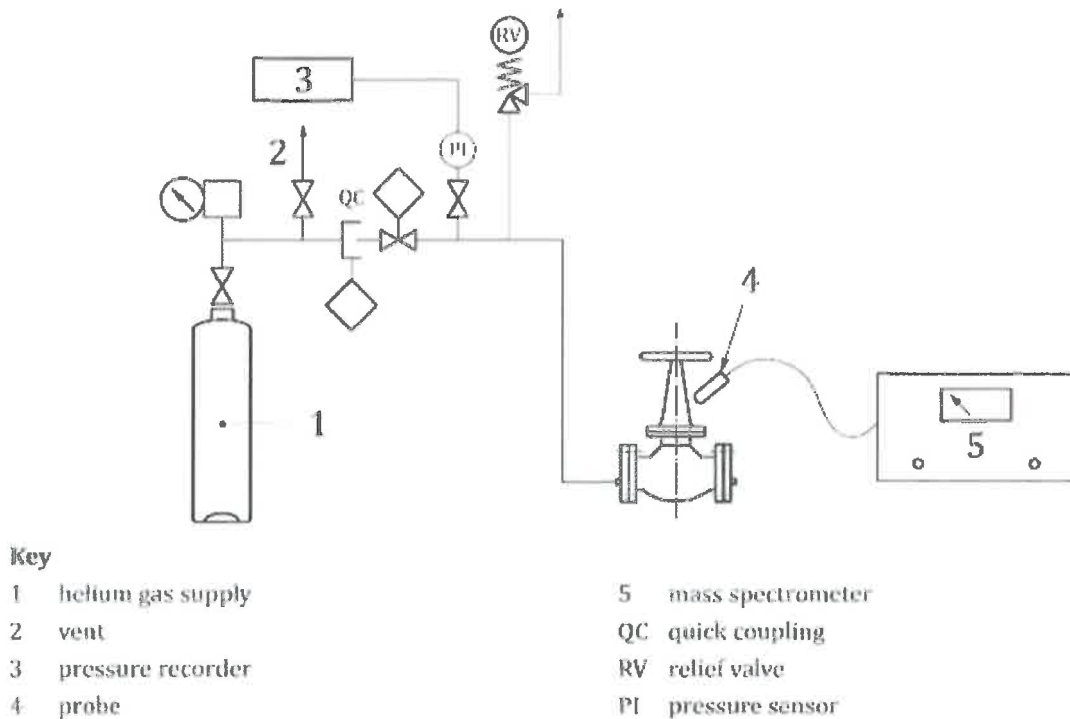

2. Document review

The specific product data file provided by the valve manufacturer includes:

- cross sectional valve assembly drawing;
- bill of valve material
- stem or shaft seal description, dimension and specifications;
- body seal description, dimension and specifications;
- material specifications of stem or shaft seal components;
- hydrostatic test certificate.

The above documents are reviewed with no objection.



Test Report No.: 300231

3. Technical Data of Test Valve:

a) General description of test valve

Name of manufacturer	KUN-LOK Fluid Control Equipment (Jiangsu) Co.,Ltd
Address of manufacturer	20 Xingyu Road, Airport New District, Wenzhou, Zhejiang
Item	DN25-6000PSI Sampling Valve
Valve size	DN25
Pressure rating	6000PSI
Stem size	Φ6mm
Body/bonnet material	ASTM A182 F316
Seal material	PTFE
Valve assembly drawing no.	S6-7N15-FN4FN2

4. Visual and dimensional check of the test valve:

The test valve was chosen at random by the manufacturer in its workshop and submitted to the laboratory. The visual and dimensional check was performed according to drawing No.: S6-7N15-FN4FN2 and results found satisfactory. The mark was verified on valve as following:

--	<u>DN25</u>	<u>6000PSI</u>	<u>F316</u>
Manufacturer` Brand	Size	Class	Material

The stem size was measured as Ø6mm.

5. Preparation of the test valve:

Before the fugitive emission test, the test valve was hydrostatic tested under 62.1MPa, the test showed no visible leakage or deformation. Then the valve was cleaned and dried.

6. Calibration of test instrument

The test instrument was turned on, warmed up at the minimum time according to the requirements of the equipment manufacturer and calibrated with the standard calibrated leak 99% helium according to the procedure specified in Annex A, Para.A.1.4.2 of ISO15848-1:2015+Amd.1:2017.

7. Fugitive emission test and measurement

The test valve was mounted on a test rig with the stem positioned vertical. And the fugitive emission test is carried out as per requirement of ISO15848-1:2015+Amd.1:2017 Para.5.



Test Report No.: 300231

7.1 Preliminary tests at room temperature (test 1)

The valve was pressurized with test fluid Helium to 41.4MPa according to manufacturer's requirements in the partly opened position, the temperature at locations "X"/"Y"/"Z" are measure and recorded as room temperature.

The stem seal leakage measurement was performed by the bagging method as described in ISO15848-1 Annex A.

The body seal leakage measurement was performed by the sniffing method as described in ISO15848-1 Annex B.

The test results are as follows:

Test results of preliminary tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	3.03×10^{-7}
Body seal leakage(ppmv)	≤ 50	9.7
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.2 Mechanical cycle test at the room temperature (test 2)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	5.08×10^{-7}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.3 Static test at the selected temperature (test 3)

The test valve was kept at room temperature. The test valve was kept pressure with 41.4MPa according to manufacturer's requirements. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	5.21×10^{-7}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.4 Mechanical cycle test at the selected temperature (test 4)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	7.28×10^{-7}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		



Test Report No.: 300231

7.5 Repeat static test at the room temperature (test 5)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the temperature was stabilized at room temperature. Then the stem seal leakage under 41.4MPa according to manufacturer's requirements was measured using the same method as above and the test result was recorded as follow-

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	7.21×10^{-7}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.6 Repeat mechanical cycle test at the room temperature (test 2)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	9.32×10^{-7}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.7 Repeat static test at the selected temperature (test 3)

The test valve was kept at room temperature. The test valve was kept pressure with 41.4MPa according to manufacturer's requirements. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	1.42×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.8 Repeat mechanical cycle test at the selected temperature (test 4)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	2.35×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.9 Intermediate static test at room temperature (test 5)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the temperature was stabilized at room temperature. Then the stem seal leakage under 41.4MPa according to manufacturer's requirements was measured and the test result was recorded as follow-



Test Report No.: 300231

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	2.38×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.10 Final test at room temperature (test 6)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the temperature was stabilized at room temperature. Then the stem seal leakage under 41.4MPa according to manufacturer's requirements was measured using the same method as mentioned in paragraph 7.1 after 5 mechanical cycles and the test result was recorded as follow-

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	3.41×10^{-6}
Body seal leakage(ppmv)	≤ 50	10.2
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.11 Repeat mechanical cycle test at the room temperature (test 2)

A total of 795 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	4.06×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.12 Repeat static test at the selected temperature (test 3)

The test valve was heated till to room temperature. The test valve was kept pressure with 41.4MPa according to manufacturer's requirements. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	4.26×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.13 Repeat mechanical cycle test at the selected temperature (test 4)

A total of 500 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	5.33×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		



Test Report No.: 300231

7.14 Final test at room temperature (test 6)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the temperature was stabilized at room temperature. Then the stem seal leakage under 41.4MPa according to manufacturer's requirements was measured using the same method as mentioned in paragraph 7.1 and the test result was recorded as follow-

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	5.33×10^{-6}
Body seal leakage(ppmv)	≤ 50	11.4
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.15 Repeat mechanical cycle test at the room temperature (test 2)

A total of 500 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	6.06×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.16 Repeat static test at the selected temperature (test 3)

The test valve was heated till to room temperature. The test valve was kept pressure with 41.4MPa according to manufacturer's requirements. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	6.16×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		

7.17 Repeat mechanical cycle test at the selected temperature (test 4)

A total of 500 mechanical cycles was performed on the test valve while it was kept pressurized under a differential pressure of 41.4MPa according to the manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	7.55×10^{-6}
The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.		



Test Report No.: 300231

7.18 Final test at room temperature (test 6)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the temperature was stabilized at room temperature. Then the stem seal leakage under 41.4MPa according to manufacturer's requirements was measured using the same method as mentioned in paragraph 7.1 and the test result was recorded as follow-

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.06 \times 10^{-5}$	7.65×10^{-6}
Body seal leakage(ppmv)	≤ 50	13.0

The test results meet the requirements of ISO15848-1:2015+Amd.1:2017.

8. Post test examination

After all the above tests completed, the test valve was disassembled and all sealing components visually examined. It is found that no notable wear and any other significant observations.

9. Performance classes

As a result of the above tests, the test valve covered performance classes as follows:

ISO FE BH – CO3 –SSA 0 – tRT – 6000PSI – ISO 15848-1

10. Extension of qualification to untested valves shall be according to ISO15848-1:2015+Amd.1:2017 paragraph 8.

We, hereby declare that I have checked test valve and witnessed the fugitive emission test on the tested valve according to ISO15848-1:2015+Amd.1:2017. The test results are as mentioned in this report.

TÜV SÜD Certification and Testing (China) Co., Ltd

Wang Zhong



Wang Zhong

Date: Dec. 4, 2023

Annexes:

- 1) Copy of Drawing No.: S6-7N15-FN4FN2
- 2) Test Report of Fugitive Emission Test No.: HCT2023VB08085